


# BL compact™ fieldbus station for CANopen

## 4 Analog Inputs for Current or Voltage and 8 Configurable Digital PNP Channels

### BLCCO-8M12LT-4AI-VI-8XSG-P

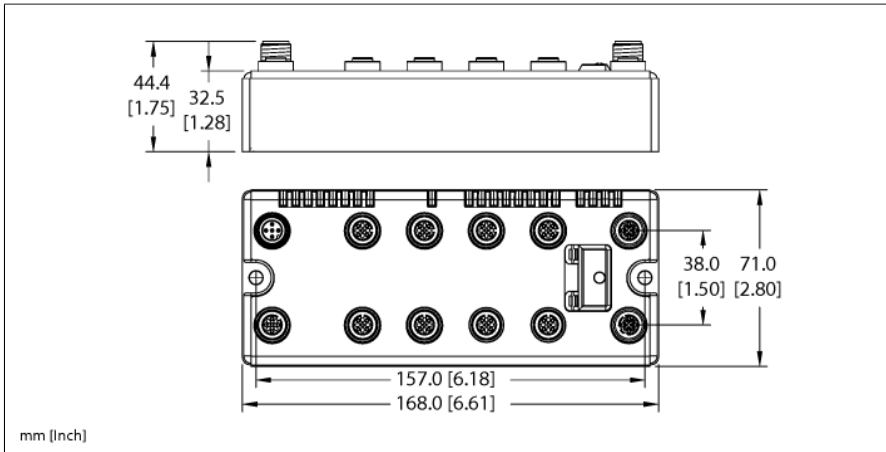

ID	6811315
Nominal system voltage	24 VDC
System power supply	Via fieldbus and auxiliary power
Voltage supply connection	2 x M12, 4-pin
Nominal current V+	30 mA
Max. current V+	4 A
Admissible range Vi	18...30 VDC
Nominal current Vi	112 mA
Max. current Vi	2 A
Admissible range Vo	18...30 VDC
Nominal current Vo	100 mA
Max. current Vo	4 A
Electrical isolation	The inputs and outputs of the 8XSG I/O cards are supplied via a common ground. Therefore, it is recommend not to use this module for safety or emergency stop applications.
Fieldbus transmission rate	10 kbps ... 1 Mbps
Adjustment transmission rate	Automatic detection
Fieldbus address range	1...99
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 x M12
	5-pole
Fieldbus termination	external
Service interface	RS232 interface
Product code	11315

- On-machine Compact fieldbus I/O block
- CANopen slave
- 10, 20, 50, 125, 250, 500, 800, or 1000 kbps
- Two 5-pole M12 connectors for fieldbus connection
- 2 rotary switches for node address
- IP67, IP69K
- M12 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- 8 Configurable digital PNP channels, 24 VDC
- Max. 0.5A per channel
- Selection of filtering times (Input delay)
- Invertible inputs
- 4 analog inputs for current or voltage
- 0/4...20 mA or -10/0...+10 VDC (selectable per channel)


Digital inputs	From 8XSG
Input type	PNP
Type of input diagnostics	Group diagnostics
Sensor supply ( $V_{\text{SENS}}$ )	24 VDC
Low-level signal voltage	4.5 V
Low-level signal voltage	< 4.5 VDC
High-level signal voltage	7...30 VDC
Low-level signal current	< 1.5 mA
High-level signal current	2.1...3.7 mA
Input delay	0.25 or 2.5 ms (configurable)

Digital outputs	From 8XSG
Output type	PNP
Sensor supply ( $V_{\text{SENS}}$ )	24 VDC
Output current per channel	0.5 A
Output voltage	24 VDC
Output delay	3 ms
Load type	resistive, inductive, lamp load
Load resistance, resistive	> 48 $\Omega$
Load resistance, inductive	< 1.2 H
Lamp load	< 3 W
Switching frequency, resistive	< 200 Hz
Switching frequency, inductive	< 2 Hz
Switching frequency, lamp load	< 20 Hz
Short-circuit protection	yes

Analog inputs	from 4AI-VI
Operating modes	0/4 ... 20 mA or -10/0 ... 10 VDC
Type of input diagnostics	Channel diagnostics
Sensor supply	24 VDC, 1 amp max.
Input resistance	Current: < 0.125 K $\Omega$ , Voltage: < 98.5 K $\Omega$
Maximum limiting frequency analog	< 20 Hz
Basic fault limit at 23 °C	< 0.3 %
Repeatability	< 0.05 %
Temperature coefficient	< 300 ppm / °C of full scale
Resolution	16 Bit
Measuring principle	Sigma Delta
Measurement display	16 bit signed integer 12 bit full range left-justified

Dimensions	168 x 71 x 32.5 mm
Mounting	2 x 5.4 mm diameter holes, 1.7 Nm torque
Weight	620 $\pm$ 20 g
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Material screw	Nickel-plated brass
Material label	Polyester with polycarbonate overlay
Ground label material	Nickel plated brass
Protection class	IP67 IP69K
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	Acc. to IEC 61131-2
- up to 20 g (at 10 up to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electromagnetic compatibility	Acc. to IEC 61131-2
Approvals and certificates	CE, cULus



## Pinning and wiring diagram

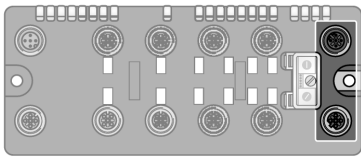

### CANopen

Fieldbus cable (example): RSC RKC 572-2M ident-no. U0323 or RSC-RKC572-2M ident-no. 6603629


### Pin Assignment

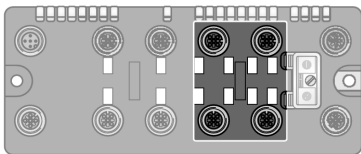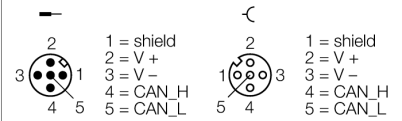


### Slot 1: Analog Inputs

Extension cable (example): RK 4.5T-2-RS 4.5T/S653 ident-no. U2187-09 or RKC4.5T-2-RSC4.5T/TEL ident-no. 6625212


### Pin Assignment




### 2-wire Technology (Current)

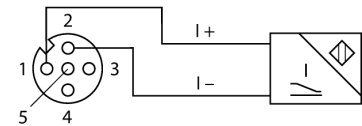


### 2-wire Technology (Voltage)

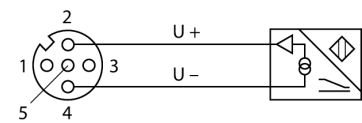


### 3-wire Technology

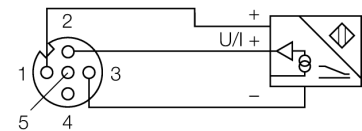


### 4-wire Technology

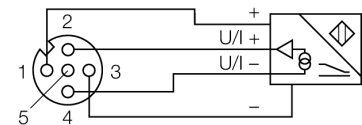

### 4-wire Technology (External Power)


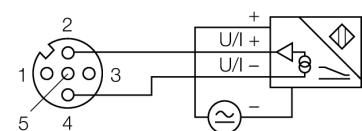


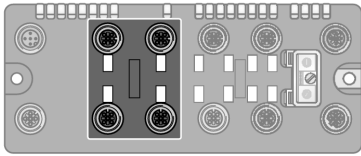

**Slot 2: Digital Inputs and Outputs**

Extension cable (example): RK 4.4T-2-RS 4.4T ident-no. U2445 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208


**Pin Assignment**

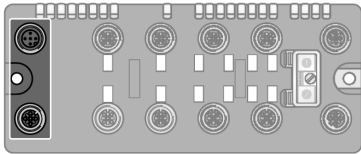

**Auxiliary Power**

Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no. U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208

**Pin Assignment**



**Station LED status**

LED	Color	Status	Description
IOs		OFF	No power
	RED	ON	Low power or station error
	RED	FLASHING (1 Hz)	I/O module configuration error
	RED	FLASHING (4 Hz)	No I/O module bus communication
	GREEN	ON	Station ok
	GREEN	FLASHING	Force mode active
ERR	-	OFF	No communication error
	RED	ON	CAN bus communication error
BUS	GREEN	ON	NMT-slave state is „Operational“
	ORANGE	ON	NMT-slave state is „Pre-Operational“
	RED	ON	NMT-slave state is „Stopped“
ERR & BUS	RED (ERR) & GREEN (BUS)	FLASHING (4 Hz)	Searching for the baud rate

**I/O LED status slot 1**

LED	Color	Status	Description
D1 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 1)
AI channels 1 <sub>0</sub> ...1 <sub>3</sub>		OFF	Not active
	GREEN	ON	Active
	GREEN	FLASHING (0.5 Hz)	Underflow in measuring range
	GREEN	FLASHING (4 Hz)	Overflow in measuring range

\* D1 LED also indicates gateway diagnostics

**I/O LED status slot 2**

LED	Color	Status	Description
D2 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 2)
XSG channels 2 <sub>0</sub> ...2 <sub>7</sub>		OFF	Channel status x = "0" (OFF), no diagnostics active
	GREEN	ON	Channel status x = "1" (ON)
	RED	ON	Short-circuit at output

\* D2 LED also indicates gateway diagnostics

## I/O Data Map

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
AI 1 <sub>0</sub>	0	AI 1 <sub>0</sub> LSB							
	1	AI 1 <sub>0</sub> MSB							
AI 1 <sub>1</sub>	2	AI 1 <sub>1</sub> LSB							
	3	AI 1 <sub>1</sub> MSB							
AI 1 <sub>2</sub>	4	AI 1 <sub>2</sub> LSB							
	5	AI 1 <sub>2</sub> MSB							
AI 1 <sub>3</sub>	6	AI 1 <sub>3</sub> LSB							
	7	AI 1 <sub>3</sub> MSB							
	8	DI 2 <sub>7</sub>	DI 2 <sub>6</sub>	DI 2 <sub>5</sub>	DI 2 <sub>4</sub>	DI 2 <sub>3</sub>	DI 2 <sub>2</sub>	DI 2 <sub>1</sub>	DI 2 <sub>0</sub>
	9	-	-	-	-	-	-	-	-
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	DO 2 <sub>7</sub>	DO 2 <sub>6</sub>	DO 2 <sub>5</sub>	DO 2 <sub>4</sub>	DO 2 <sub>3</sub>	DO 2 <sub>2</sub>	DO 2 <sub>1</sub>	DO 2 <sub>0</sub>
	1	-	-	-	-	-	-	-	-