


# BL compact™ fieldbus station for DeviceNet™

## 16 Configurable Digital PNP Channels

### BLCDN-16M8LT-8XSG-PD-8XSG-PD

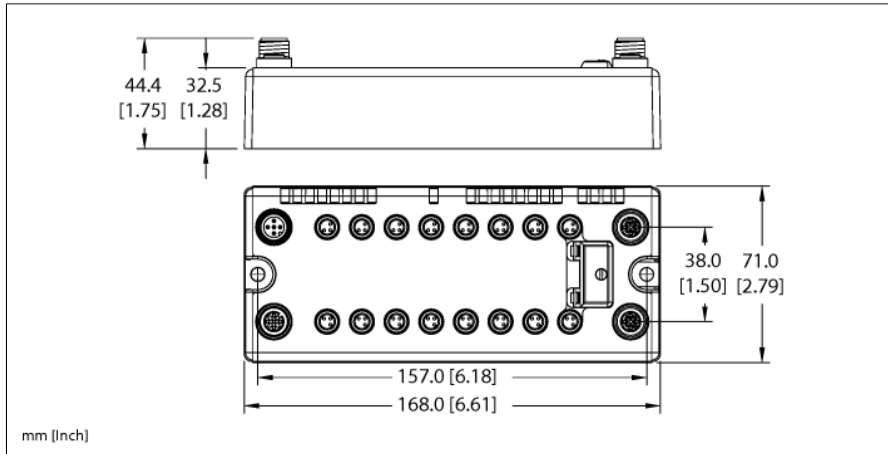

ID	6811059
Nominal system voltage	24 VDC
System power supply	Via fieldbus and auxiliary power
Voltage supply connection	2 x M12, 4-pin
Admissible range V+	11...30 VDC
Nominal current V+	30 mA
Max. current V+	4 A
Admissible range Vi	18...30 VDC
Nominal current Vi	200 mA
Max. current Vi	2 A
Admissible range Vo	18...30 VDC
Nominal current Vo	200 mA
Max. current Vo	4 A
Electrical isolation	The inputs and outputs of the 8XSG I/O cards are supplied via a common ground. Therefore, it is recommend not to use this module for safety or emergency stop applications.
Fieldbus transmission rate	125/250/500 kbps
Adjustment transmission rate	Automatic detection
Fieldbus address range	0...63 64...80 (MacID programmable) 81...99 (manufacturer specific)
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 x M12
Fieldbus termination	5-pole external
Service interface	RS232 interface
Vendor ID	48
Product type	12
Product code	11059


- On-machine Compact fieldbus I/O block
- DeviceNet™ slave
- 125 / 250 / 500 kbps
- Two 5-pole M12 connectors for fieldbus connection
- 2 rotary switches for node address
- IP67
- M8 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- 16 Configurable digital PNP channels, 24 VDC
- Max. 0.5A per channel
- Channel diagnostics
- Selection of filtering times (Input delay)
- Invertible inputs

Digital inputs	
Input type	PNP
Type of input diagnostics	Channel diagnostics
Sensor supply ( $V_{\text{SENS}}$ )	24 VDC, 100 mA short-circuit limiting
Low-level signal voltage	< 4.5 VDC
High level signal voltage	7 ... 30 VDC
Low level signal current	< 1.5 mA
High level signal current	2.1 ... 3.7 mA
Input delay	0.25 ms or 2.5 ms (configurable)

Digital outputs	
Output type	PNP
Type of output diagnostics	Channel diagnostics
Sensor supply ( $V_{\text{SENS}}$ )	24 VDC
Output current per channel	0.5 A
Output voltage	24 VDC from supply voltage
Output delay	3 ms
Load type	resistive, inductive, lamp load
Load resistance, resistive	> 48 $\Omega$
Load resistance, inductive	< 1.2 H
Lamp load	< 3 W
Switching frequency, resistive	< 200 Hz
Switching frequency, inductive	< 2 Hz
Switching frequency, lamp load	< 20 Hz
Short-circuit protection	yes

Dimensions	168 x 71 x 32.5 mm
Mounting	2 x 5.4 mm diameter holes, 1.7 Nm torque
Weight	590 $\pm$ 20 g
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Material screw	Nickel-plated brass
Material label	Polyester with polycarbonate overlay
Ground label material	Nickel plated brass
Protection class	IP67
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	Acc. to IEC 61131-2
- up to 20 g (at 10 up to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electromagnetic compatibility	Acc. to IEC 61131-2
Approvals and certificates	CE, cULus


## Pinning and wiring diagram

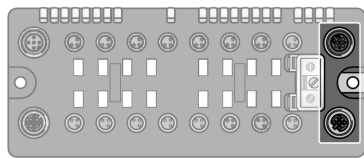

### DeviceNet

Fieldbus cable (example): RSC RKC 572-2M ident-no. U0323 or RSC-RKC572-2M ident-no. 6603629



### Pin Assignment

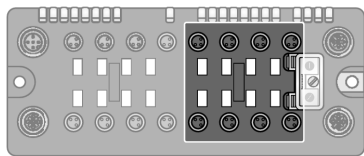

### Slot 1: Digital Inputs and Outputs



Extension cable (example): PKG 3M-2-PSG 3M ident-no. U2515-20 or PKG3M-2-PSG3M/TEL ident-no. 6625303

### Pin Assignment

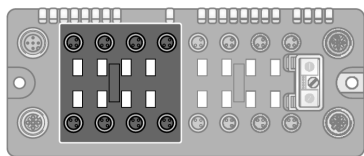

### Slot 2: Digital Inputs and Outputs


### Pin Assignment

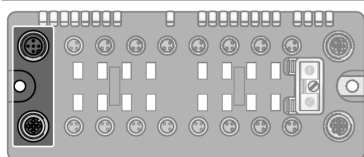

### Auxiliary Power

Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no. U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208

### Pin Assignment



**Station LED status**

LED	Color	Status	Description
IOs		OFF	No power
	RED	ON	Low power or station error
	RED	FLASHING (1 Hz)	I/O module configuration error
	RED	FLASHING (4 Hz)	No I/O module bus communication
	GREEN	ON	Station ok
	GREEN	FLASHING	Force mode active
MNS		OFF	No connection
	GREEN	ON	Connection established
	GREEN	FLASHING (1 Hz)	No connection established, device OK
	RED	ON	Duplicate MAC-ID
	RED	FLASHING	Connection time out
IO	GREEN	ON	I/O active
	GREEN	FLASHING (1 Hz)	One or more I/O in Idle State
	RED	ON	One or more I/O error
	RED	FLASHING	One or more I/O in Faulted State

**I/O LED status slot 1**

LED	Color	Status	Description
D1 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 1)
XSG channels 0...7		OFF	Channel status x = "0" (OFF), no diagnostics active
	GREEN	ON	Channel status x = "1" (ON)
	RED	ON	Short-circuit at output
	RED	FLASHING (2 Hz)	Short-circuit sensor supply

\* D1 LED also indicates gateway diagnostics

**I/O LED status slot 2**

LED	Color	Status	Description
D2 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 2)
XSG channels 0...7		OFF	Channel status x = "0" (OFF), no diagnostics active
	GREEN	ON	Channel status x = "1" (ON)
	RED	ON	Short-circuit at output
	RED	FLASHING (2 Hz)	Short-circuit sensor supply

\* D2 LED also indicates gateway diagnostics

**I/O & Diagnostic Data Map**

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	DI 1 <sub>7</sub>	DI 1 <sub>6</sub>	DI 1 <sub>5</sub>	DI 1 <sub>4</sub>	DI 1 <sub>3</sub>	DI 1 <sub>2</sub>	DI 1 <sub>1</sub>	DI 1 <sub>0</sub>
	1	DI 2 <sub>7</sub>	DI 2 <sub>6</sub>	DI 2 <sub>5</sub>	DI 2 <sub>4</sub>	DI 2 <sub>3</sub>	DI 2 <sub>2</sub>	DI 2 <sub>1</sub>	DI 2 <sub>0</sub>
Diagnostics	2	Module number reporting diagnostic data							
	3	Replace Station	-	Diagnostics Active	-	-	-	-	-
Slot X* (ref. Byte 2)	4	-	-	-	-	Over Current DI X <sub>3</sub> / DI X <sub>7</sub>	Over Current DI X <sub>2</sub> / DI X <sub>6</sub>	Over Current DI X <sub>1</sub> / DI X <sub>5</sub>	Over Current DI X <sub>0</sub> / DI X <sub>4</sub>
	5	Over Current DO X <sub>7</sub>	Over Current DO X <sub>6</sub>	Over Current DO X <sub>5</sub>	Over Current DO X <sub>4</sub>	Over Current DO X <sub>3</sub>	Over Current DO X <sub>2</sub>	Over Current DO X <sub>1</sub>	Over Current DO X <sub>0</sub>
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	DO 1 <sub>7</sub>	DO 1 <sub>6</sub>	DO 1 <sub>5</sub>	DO 1 <sub>4</sub>	DO 1 <sub>3</sub>	DO 1 <sub>2</sub>	DO 1 <sub>1</sub>	DO 1 <sub>0</sub>
	1	DO 2 <sub>7</sub>	DO 2 <sub>6</sub>	DO 2 <sub>5</sub>	DO 2 <sub>4</sub>	DO 2 <sub>3</sub>	DO 2 <sub>2</sub>	DO 2 <sub>1</sub>	DO 2 <sub>0</sub>

\* The scheduled diagnostic information changes every 125 ms between Slot 1 and Slot 2, if both slots send active diagnostics.