

FDNP-L0808H-TT/CS30007



This station provides eight inputs and eight outputs. There are four dual input connectors on the left and four dual output connectors on the right. All inputs and outputs are powered by auxiliary power.

Each input connector provides E+, E-, Input A (odd), Input B (even), and PE. The E+ provides power to the attached sensor. The E+ is short-circuit protected and monitored as a group. Input A is indicated by the upper LED. Input B is indicated by the lower LED. A three-wire sensor will only use Input A, while a four-wire sensor will use both.

Each output connector provides V-, Output A (odd), Output B (even), and PE. Outputs are individually short-circuit protected, but monitored as a group. Output A is indicated by the upper LED. Output B is indicated by the lower LED. The V- is the output ground.

The node address can be set using the rotary switches located under the device cover or through software node commissioning. The communication rate is fixed at 500 kbps (Auto-Baud is disabled).

The FDNP-L0808H-TT/CS30007 supports explicit messaging, polled, change of state, and cyclic I/O messages. These connections are established through UCMM or predefined master/slave connection set.

Recommended Cordsets:

Bus line: RSM RKM 579-*M

Auxiliary power: RSM RKM 47- *M

Inputs / Outputs: VB2-RS 4.4T-*/2 RK 4.4T-*/* or RK 4.4T-*--RS 4.4T

FDNP-L0808H-TT/CS30007

- Advanced DeviceNet™ station
- 4 x 2 discrete inputs and
4 x 2 discrete outputs


Applications

- For wet or dry environments
- For use with eight 3-wire or four 4-wire proximity or photoelectric sensors, and eight discrete actuators

Features


- PNP short-circuit protected inputs
- 0.5 amp short-circuit protected outputs
- Glass filled nylon with nickel plated brass connectors
- Rotary address switches
- 500 kbps

Dimensions

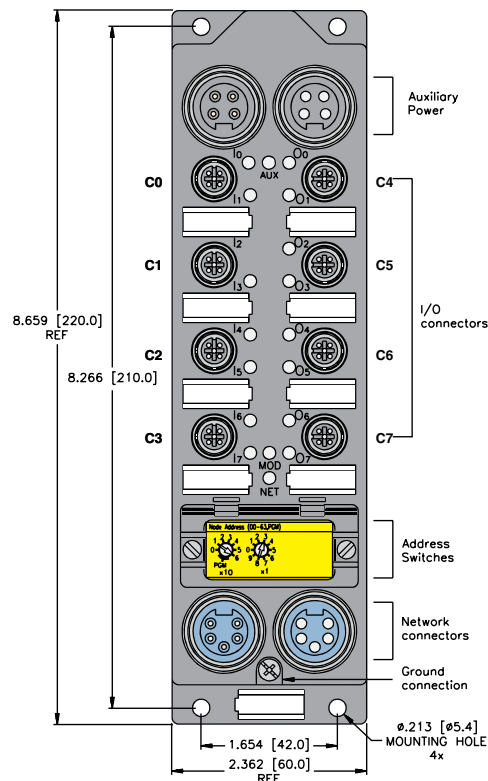


FDNP-L0808H-TT/CS30007


Connectors

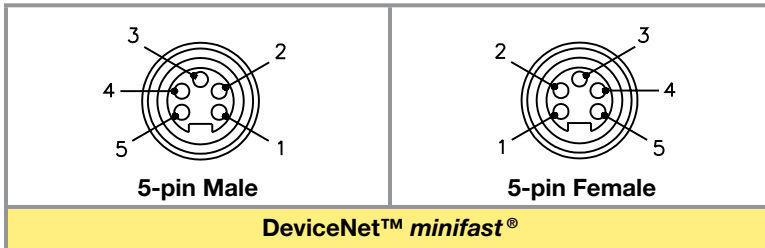


- 1 = Shield
- 2 = V +
- 3 = V -
- 4 = CAN_H
- 5 = CAN_L

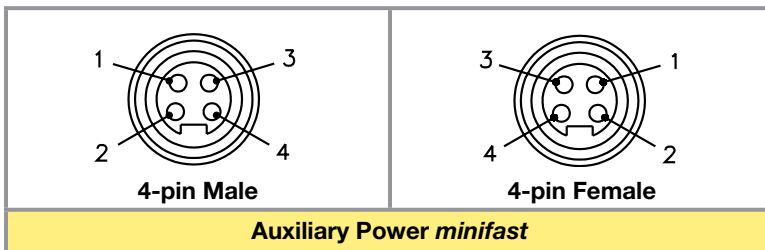

- 1 = V+ - Outputs
- 2 = E+ - Inputs
- 3 = E- - Inputs
- 4 = V- - Outputs

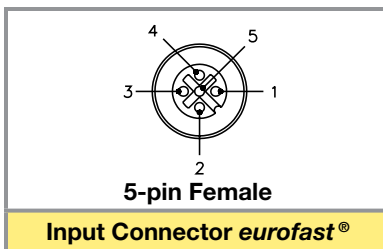

- 1 = E +
- 2 = Input (Odd)
- 3 = E -
- 4 = Input (Even)
- 5 = PE

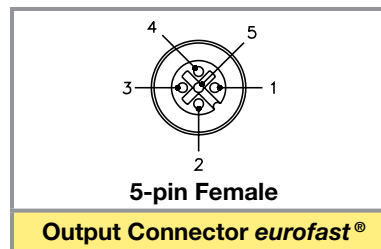

- 1 = Not Connected
- 2 = Output (Odd)
- 3 = V -
- 4 = Output (Even)
- 5 = PE

I/O Data Mapping

Item Number F2031
Product Type / Code: 7/2031

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Input Data	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	IGS	OGS	-	-	-	-	-	-
Output Data	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	O-7	O-6	O-5	O-4	O-3	O-2	O-1	O-0

Abbreviations

I = Input Data (0=OFF, 1=ON)
IGS = Input Group Status (0=Working, 1=Fault)
O = Output Data (0=OFF, 1=ON)
OGS = Output Group Status (0=Working, 1=Fault)

Module Specifications

Supply Voltage

Bus Power	11-26 VDC
Internal Current Consumption	<75 mA (from bus power)
Auxiliary Power	18-26 VDC

FDNP-L0808H-TT/CS30007

Input Circuits (8) PNP 3-wire sensors or dry contacts

Input Voltage (E+)	13-26 VDC (from auxiliary power)
Input Short-Circuit (E+)	700 mA - 2.0A (total)
Input Signal Current (I)	OFF <2 mA
	ON 3.0-3.4 mA at 24 VDC
Input Delay	2.5 ms

Output Circuits (8) DC actuators

Output Voltage	18-26 VDC (from auxiliary power)
Output Load Current	0.5 A per output (from auxiliary power)
Open Circuit Current	<1 mA per output
Maximum Switching Frequency	100 Hz

I/O LED Indications

Off = Not active
Green = Active

Module Status LED

Green = Operating
Flashing Green = Autobaud
Flashing Red = I/O Short

Network Status LED

Off = No connection
Green = Established connection
Flashing green = Ready for connection
Flashing red = Connection time-out
Red = Connection not possible

Auxiliary Power Status LED

Off = Power off
Green = Both I/O power on
Amber = Only one I/O power on

Address

0-63 (via rotary switch)
Address from internal EEPROM (rotary switch must be in PGM position)

Housing

Dimensions	220 x 60 x 40mm (H x W x D)
Material	Glass-filled nylon, nickel plated brass connectors
Enclosure	NEMA 1, 3, 4, 6, 6P, 12, 13 and IEC IP 67, 68, and 69K
Operating Temperature	-40° to +70°C (-40° to 158° F)