


SPECIFICATIONS

| | |
|-----------------------------|----------------------------------|
| RATED OPERATING DISTANCE | 4.0mm [.157"] |
| MOUNTING MODE | FLUSH |
| TEMPERATURE DRIFT | ≤ ±10% |
| HYSTERESIS | 3-15% |
| MIN. REPEAT ACCURACY | ≤ 2% |
| OPERATING TEMPERATURE | -25°C to +70°C (-13°F to +158°F) |
| RATED OPERATIONAL VOLTAGE | 10-30 VDC |
| RESIDUAL RIPPLE | ≤ 10% |
| RATED OPERATIONAL CURRENT | ≤ 200 mA |
| NO-LOAD CURRENT | ≤ 15 mA |
| RESIDUAL CURRENT | ≤ 0.1 mA |
| RATED INSULATION VOLTAGE | ≤ 0.5 kV |
| SHORT-CIRCUIT PROTECTION | YES |
| MAX. VOLTAGE DROP | ≤ 1.8 V |
| WIRE BREAKAGE PROTECTION | INCORPORATED |
| REVERSE POLARITY PROTECTION | INCORPORATED |
| OUTPUT FUNCTION | 3-WIRE, NORMALLY OPEN, NPN |
| MAX. SWITCHING FREQUENCY | ≤ 2.0 kHz |
| HOUSING MATERIAL | BRASS, CHROME-PLATED |
| ACTIVE FACE MATERIAL | PLASTIC, PA12-GF20 |
| CABLE | ø5.2, LifyY, PVC |
| VIBRATION RESISTANCE | 55 Hz (IN ALL 3 PLANES) |
| SHOCK RESISTANCE | 30 g, 11 ms |
| DEGREE OF PROTECTION | IP 67 |
| SWITCHING STATUS INDICATION | LED: YELLOW |

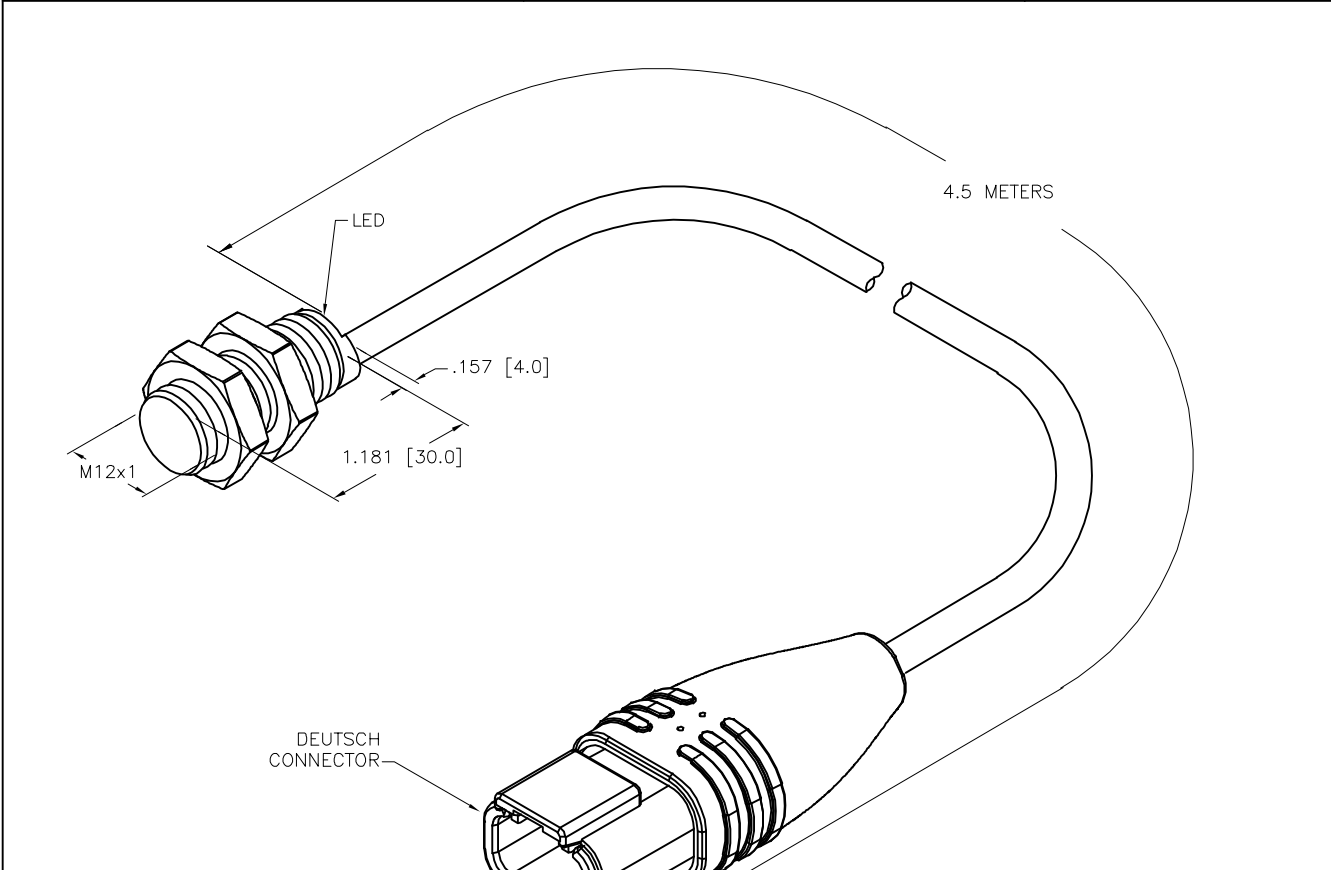

NOTES:

1. DEUTSCH PART NUMBERS
CONNECTOR: DTM04-3P
WEDGE: WM-3P
PINS: 0460-202-20141

SOURCE DRAWING - FOR REFERENCE ONLY

| | | | | |
|---|---|--|--|--|
| RELATED DOCUMENTS 1. 2. 3. 4. | 3RD ANGLE PROJECTION | THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. | 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us | |
| | | | | |
| MATERIAL SEE NOTES | ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY | DRFT NF | DATE 08/08/19 | DESCRIPTION B14-G12K-AN6X-4.5-DTM04-3PM3.21 |
| FINISH SEE NOTES | | APVD A.F. | SCALE 1=1.0 | |
| | | UNIT OF MEASUREMENT INCH [MILLIMETER] | | IDENTIFICATION NO. 100010710 |
| | | DO NOT SCALE THIS DRAWING | | REV A |
| | | FILE: 100010710 | | SHEET 1 OF 1 |

| | | | | |
|-----|-----------------|----|----------|---------|
| A | DRAWING RELEASE | NF | 09/09/19 | |
| REV | DESCRIPTION | BY | DATE | ECO NO. |