



MALE END VIEW




- 1 = N/C
- 2 = +24VDC
- 3 = GND
- 4 = N/C




FEMALE END VIEW




- 1 = WHITE/ORANGE (+TX)
- 2 = WHITE/BLUE (+RX)
- 3 = ORANGE (-TX)
- 4 = BLUE (-RX)



FEMALE END VIEW



- 1 = V+
- 2 = DATA -
- 3 = V-
- 4 = DATA +

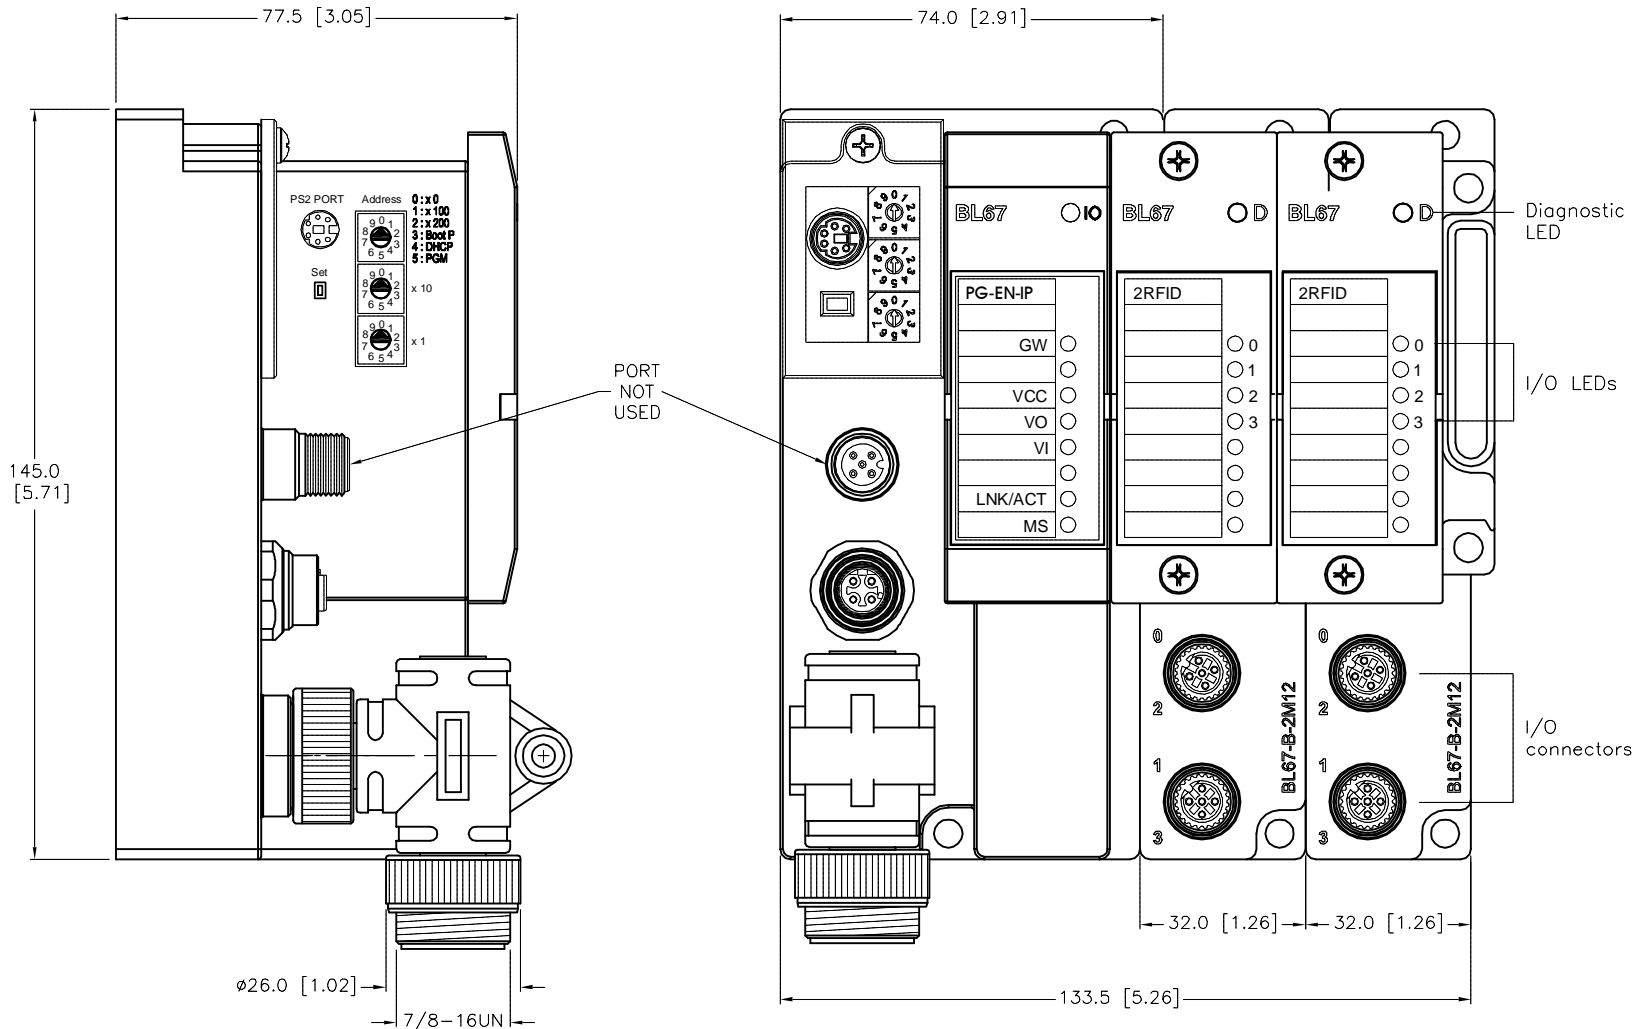

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. IP ADDRESS PRESET TO 136.129.1.1 (LAST OCTET OF IP ADDRESS SET WITH ROTARY SWITCH VALUES 1-254 FOLLOWED BY A POWER CYCLE), NETMASK SET TO 255.255.0.0
2. "/CS30039" DESIGNATES PRELOADING OF A PROGRAM TO THE DEVICE FOR RFID INTERFACING.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				DRFT RDS DATE 10/19/10 APVD SCALE 1=1.5		DESCRIPTION BL67-PKG-1016/CS30039			
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. BL10047		REV E	
FINISH		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: BL10047		SHEET 1 OF 1	
E	REMOVE TRADEMARKED MATERIAL REFERENCES	CBM	11/16/12	40471					
REV	DESCRIPTION	BY	DATE	ECO NO.					