


Compact I/O modules DeviceNet™

16 digital outputs 0.5 A

FDNP-S0016N-TT-0200

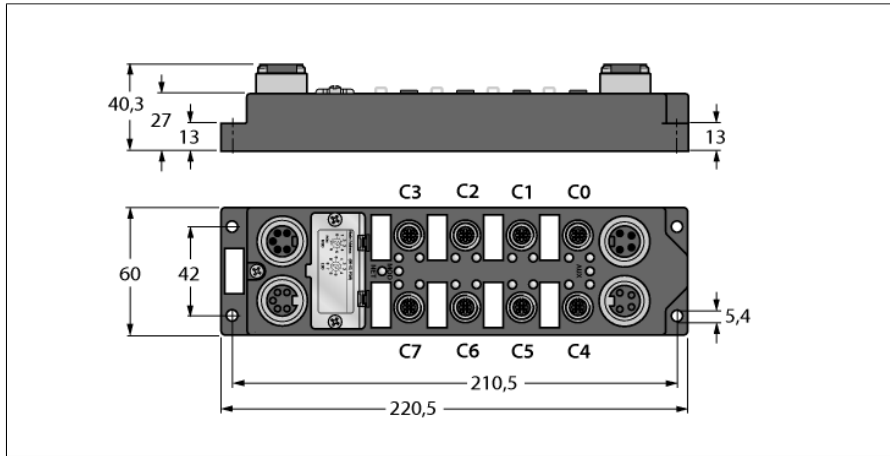

- 16 digital outputs 0.5 A
- Short-circuit monitoring
- Module-related diagnostics
- Two channels per connector
- Separate auxiliary/load voltage (Aux)
- Fibre-glass reinforced PA6 housing
- Vibration and shock-resistant
- Encapsulated module electronics
- Metal connectors
- Degree of protection IP67

Type	FDNP-S0016N-TT-0200
ID	F0200
Outputs	
Load type	resistive, inductive, lamp load
Actuator power supply	
Actuator power supply	separate (Aux)
Fieldbus transmission rate	
Fieldbus transmission rate	125/250/500 kbps
Fieldbus addressing	
Fieldbus addressing	0...63 (decimal) via coded rotary switches
Housing material	
Housing material	fibre-glass reinforced Polyamide (PA6-GF30)
Mounting	
Mounting	4 mounting holes Ø 5,4 mm
Protection class	
Protection class	IP67
MTTF	
MTTF	235 years acc. to SN 29500 (Ed. 99) 20 °C
Approvals	
Approvals	CE, UL, CSA, FM