



I/O Module for DeviceNet Fieldbus

FDNQ-S0404G-MM

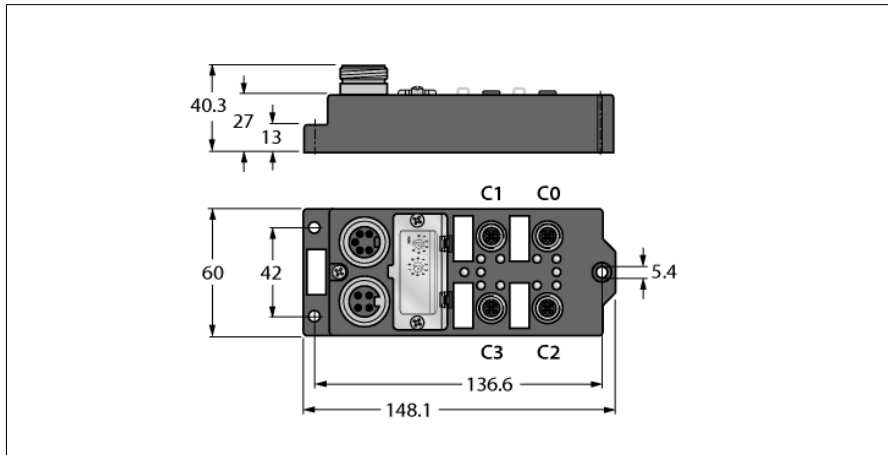

- 4 digital pnp inputs and 4 outputs
- PNP short-circuit protected inputs
- 0.5 amp short-circuit protected outputs
- Fiber-glass reinforced PA6 housing
- Vibration and shock-resistant
- Encapsulated module electronics
- Metal connectors
- Degree of protection IP67

Fieldbus



Type	FDNQ-S0404G-MM
ID	F0156
Fieldbus transmission rate	125/250/500 kbps
Fieldbus addressing	0...63 (decimal) via coded rotary switches
Dimensions (W x L x H)	60.4 x 148.1 x 27 mm
Housing material	fibre-glass reinforced Polyamide (PA6-GF30)
Mounting	4 mounting holes Ø 5,4 mm
Ambient temperature	-40...+70 °C
Protection class	IP67