

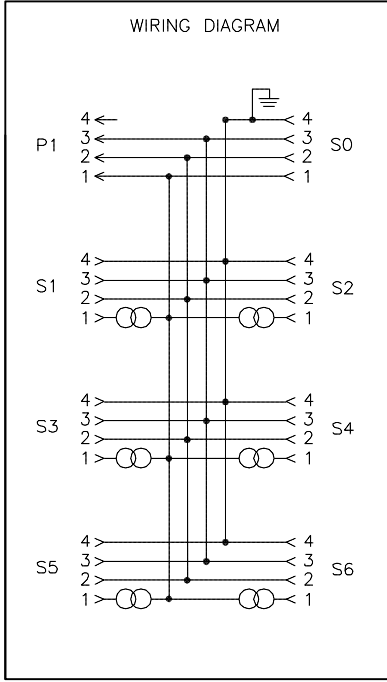
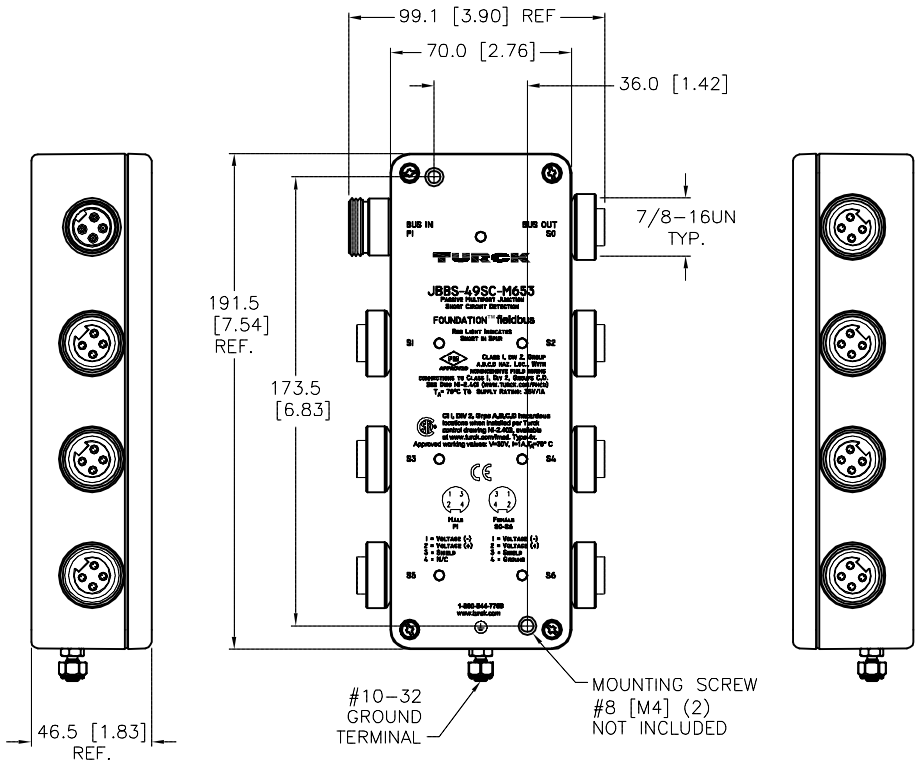


SPECIFICATIONS	
HOUSING MATERIAL/FINISH	STAINLESS STEEL/ELECTRO-POLISHED
RECEPTACLE HOUSING MAT'L/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	9-32 VDC
SHORT CIRCUIT PROTECTION	0.55 VDC @ 55mA, 0.20 VDC @ 20mA
CURRENT CONSUMPTION	5.0 mA
OPEN CIRCUIT VOLTAGE	33 VDC
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)

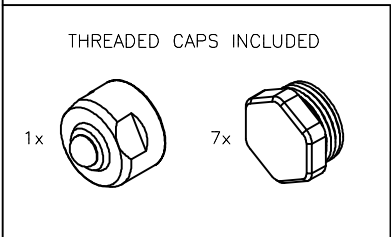

SOURCE DRAWING - FOR REFERENCE ONLY



RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
		MATERIAL	DRFT *CK	DATE 06/16/10	DESCRIPTION JBBS-49SC-M653
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	SCALE 1=3.0	IDENTIFICATION NO. U3-10870	
CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		REV B	DO NOT SCALE THIS DRAWING
B UPDATE HOUSING FINISH	RDS 02/01/13	41139	FILE: U3-10870	SHEET 1 OF 1	
REV DESCRIPTION	BY DATE ECO NO.				