


SPECIFICATIONS	
HOUSING MATERIAL	NYLON
HOUSING FINISH/COLOR	BLUE GREY
RECEPT. HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIER MAT'L/COLOR	TPU/BLUE-GRAY
CONTACT MAT'L/PLATING	BRASS/GOLD
OPERATING VOLTAGE	24 V
OPERATING CURRENT	4.0 A PER SIGNAL (EUROFAST); 7.0 A TOTAL (MINIFAST)
PROTECTION CLASS	NEMA 1,3,4,6P AND IP67 - ONLY WHEN ALL RECEPT. COVERED W/ PLUGS OR CONNECTED
OPERATING TEMPERATURE	-25°C to +70°C (-13°F to +158°F)
LED FUCTION	(2) POWER LEDs: 1 AMBER (LO)<12.9 V 1 GN (OK) 12.9V-25.6V, 2 AMBER (HI)>25.6V

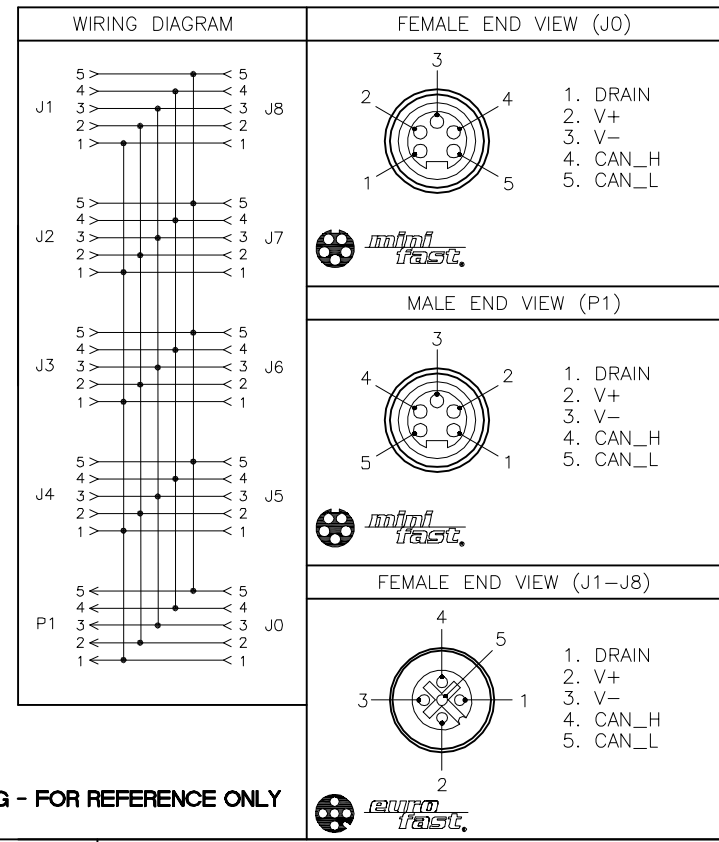

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:  
1. "/CS30169" "DEVICENET" LOGO REMOVED FROM CLICHE AND PRINTED LABELS INSERTED IN BOX.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.		DRFT RDS	DATE 11/08/19	DESCRIPTION JBBS-57-E811/CS30169	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD T.S.	SCALE 1=1.5		
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT <b>MILLIMETER [ INCH ]</b>		IDENTIFICATION NO. 100014129	REV C
C UPDATED DRAWING	AS 03/17/26	DO NOT SCALE THIS DRAWING		FILE: 100014129	SHEET 1 OF 1
REV DESCRIPTION	BY DATE ECO NO.				