

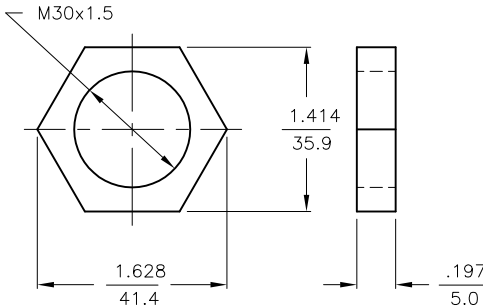



WIRING DIAGRAMS		LOCKNUT LN-M30		SPECIFICATIONS																			
				<table><tr><td>RATED OPERATING DISTANCE</td><td>20mm = .788"</td></tr><tr><td>MOUNTING MODE</td><td>NON-FLUSH</td></tr><tr><td>MIN. REPEAT ACCURACY</td><td>≤ 2%</td></tr><tr><td>TEMPERATURE DRIFT</td><td>≤ ±10%</td></tr><tr><td>HYSTERESIS</td><td>3-15%</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-25°C to +70°C (-13°F to +158°F)</td></tr><tr><td>RATED OPERATIONAL VOLTAGE</td><td>10-30 VDC</td></tr><tr><td>RESIDUAL RIPPLE</td><td>≤ 10%</td></tr><tr><td>DC RATED OPERATIONAL CURRENT</td><td>≤ 200 mA</td></tr></table>		RATED OPERATING DISTANCE	20mm = .788"	MOUNTING MODE	NON-FLUSH	MIN. REPEAT ACCURACY	≤ 2%	TEMPERATURE DRIFT	≤ ±10%	HYSTERESIS	3-15%	OPERATING TEMPERATURE	-25°C to +70°C (-13°F to +158°F)	RATED OPERATIONAL VOLTAGE	10-30 VDC	RESIDUAL RIPPLE	≤ 10%	DC RATED OPERATIONAL CURRENT	≤ 200 mA
RATED OPERATING DISTANCE	20mm = .788"																						
MOUNTING MODE	NON-FLUSH																						
MIN. REPEAT ACCURACY	≤ 2%																						
TEMPERATURE DRIFT	≤ ±10%																						
HYSTERESIS	3-15%																						
OPERATING TEMPERATURE	-25°C to +70°C (-13°F to +158°F)																						
RATED OPERATIONAL VOLTAGE	10-30 VDC																						
RESIDUAL RIPPLE	≤ 10%																						
DC RATED OPERATIONAL CURRENT	≤ 200 mA																						
SHORT-CIRCUIT AND OVERLOAD PROTECTED																							

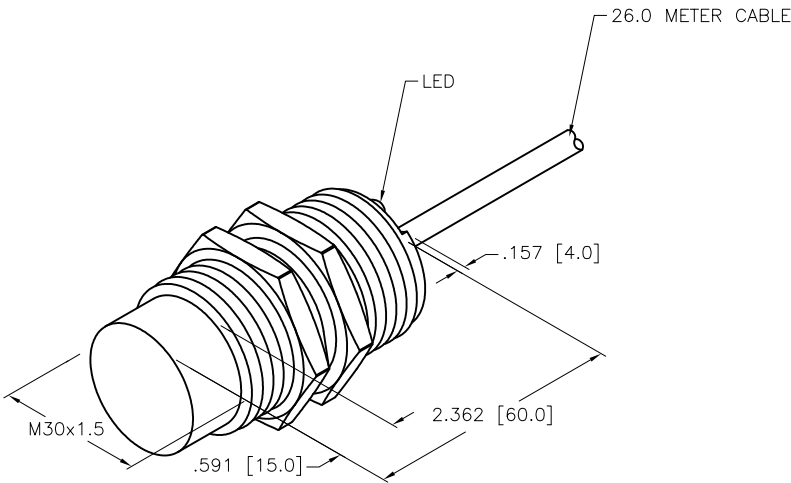

NOTES:

1. "/S1009" DESIGNATES 250 ms INTERNAL OFF DELAY.

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "/S1009" DESIGNATES 250 ms INTERNAL OFF DELAY.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
					1.								
					2.								
					3.								
4.		MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 01/16/12		DESCRIPTION NI20-G30-AP6X/S1009 26M			
						APVD J.M.		SCALE 1=1.5					
		FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT INCH [MILLIMETER]				IDENTIFICATION NO. 4670586		REV B	
						DO NOT SCALE THIS DRAWING				FILE: 4670586		SHEET 1 OF 1	
B	UPDATE ID NUMBER PER HARMONIZATION PROJECT			CBM	11/06/17								
REV	DESCRIPTION			BY	DATE	ECO NO.							