
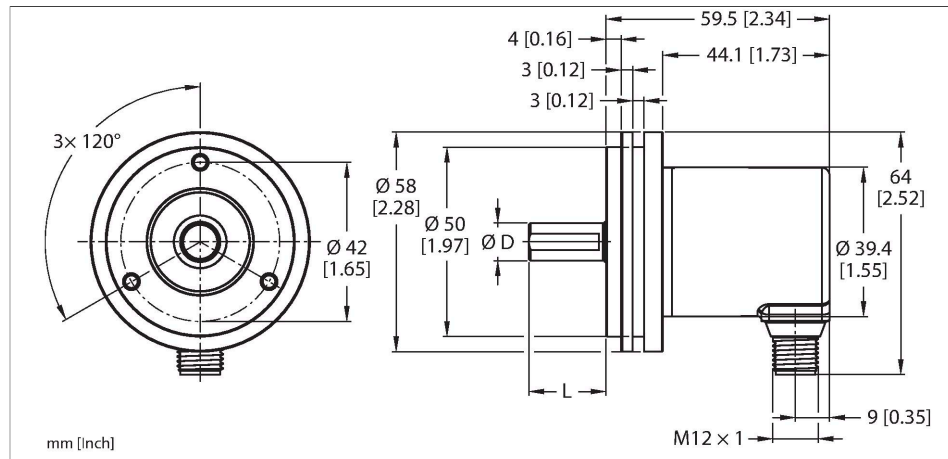


REM-E-195T10S-IOL32B-H1141

Absolute Rotary Encoder - Multiturn – IO-Link

Efficiency Line





Technical data

Type	REM-E-195T10S-IOL32B-H1141
ID	100021184
Measuring principle	Magnetic
General data	
Max. rotational speed	4000 rpm
Repetition accuracy	± 0.2 °
Absolute accuracy	± 0.5 °
Output type	Absolute multiturn
Electrical data	
Operating voltage U _B	18...30 VDC
No-load current	≤ 40 mA
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Communication protocol	IO-Link
IO-Link	
IO-Link specification	V 1.1
Programming	FDT/DTM
Mechanical data	
Flange type	Synchro flange
Flange diameter	Ø 58 mm
Shaft Type	Solid shaft
Shaft diameter D (mm)	10
Shaft Length L [mm]	20

Features

- Ø 58 mm servo flange
- Solid shaft, Ø 10mm x 20mm
- Optical measuring principle
- Shaft material, stainless steel
- Protection class IP64 on housing and shaft side
- -20...+70 °C
- Max. 4000 rpm (continuous operation 2000 rpm)
- Energy harvesting technology
- 18...30 VDC
- M12 x 1 male connection, 4-pin
- Singleturn resolution 14 bit scalable, default 14 bit
- Multiturn resolution scalable only to 18 bits over total resolution, default 18 bits
- Total resolution 32 bit scalable, default 32 bit











Wiring diagram



Technical data

Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
	5-pin
Axial shaft load	40 N
Radial shaft load	80 N
Environmental conditions	
Ambient temperature	-20...+70 °C
Vibration resistance (EN 60068-2-6)	30 g (300 m/s ²), 10...2000 Hz
Shock resistance (EN 60068-2-27)	500 g (2500 m/s ²), 4 ms
Protection class	IP64
Protection class shaft	IP64
MTTF	25 years

Accessories

RA-BC-20-06-10 	100048779 Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 10 mm
RA-BC-20-10-10 	100048782 Bellows coupling with aluminum hub Ø 20 mm; d1 = 10 mm, d2 = 10 mm
RA-BC-E-20-06-10 	100048786 Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 10 mm
RA-BC-E-20-10-12 	100048788 Stainless steel bellows coupling Ø 20 mm; d1 = 10 mm, d2 = 12 mm
RA-SDC-30-10-12 	100048793 Spring disc coupling Ø 30 mm; d1 = 10 mm, d2 = 12 mm
RA-BC-20-08-10 	100048781 Bellows coupling with aluminum hub Ø 20 mm; d1 = 8 mm, d2 = 10 mm
RA-BC-20-10-12 	100048783 Bellows coupling with aluminum hub Ø 20 mm; d1 = 10 mm, d2 = 12 mm
RA-BC-E-20-10-10 	100048787 Stainless steel bellows coupling Ø 20 mm; d1 = 10 mm, d2 = 10 mm
RA-SDC-30-10-10 	100048792 Spring disc coupling Ø 30 mm; d1 = 10 mm, d2 = 10 mm
RA-HC-25-10-10 	100048796 Aluminum helix coupling Ø 25 mm; d1 = 10 mm, d2 = 10 mm

RA-HC-25-10-12

100048797

Aluminum helix coupling Ø 25 mm; d1
= 10 mm, d2 = 12 mm

