


RI-10SA1Z4-2K1000-H1151

Incremental Shaft Encoder

Industrial Line


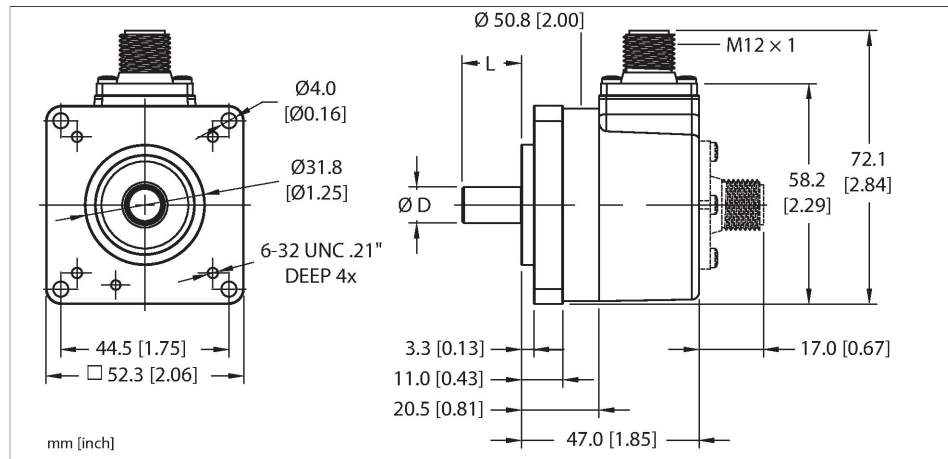


Features

- Square flange, 52.3 mm
- Solid shaft, Ø 3/8" × 5/8"
- Optical measuring principle
- Shaft material: stainless steel
- Protection class IP67 on housing and shaft side
- -40...+85 °C
- Max. 6000 rpm (continuous operation 3000 rpm)
- 5...30 VDC
- Male connector, M12 x 1, 5-pole
- Push-pull, with inverted signals
- Pulse frequency max. 300 kHz
- 1000 pulses per revolution

Technical data

Type	RI-10SA1Z4-2K1000-H1151
ID	1545877
Measuring principle	Optical
General data	
Max. rotational speed	6000 rpm
Moment of inertia of the rotor	$1.8 \times 10^{-6} \text{ kgm}^2$
Starting torque	< 0.05 Nm
Output type	Incremental
Resolution incremental	1000 ppr
Electrical data	
Operating voltage U_b	5...30 VDC
No-load current	$\leq 100 \text{ mA}$
Output current	$\leq 20 \text{ mA}$
Short-circuit protection	yes
Wire break/reverse polarity protection	no
Pulse frequency max.	300 kHz
Signal level high	min. $U_b - 2 \text{ V}$
Signal level low	max. 0.5 V
Output function	5-wire, Push-Pull 7272, with inverted signals
Mechanical data	
Flange type	Rectangular flange
Flange diameter	Ø 50.8 mm




Technical data

Shaft Type	Solid shaft
Shaft diameter D (mm)	9.525
Shaft diameter D	0.375 in
Shaft Length L [mm]	15.875
Shaft length (L)	0.625 in
Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
	5-pin
Axial shaft load	40 N
Radial shaft load	80 N
Environmental conditions	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	300 m/s ² , 10...2000 Hz
Shock resistance (EN 60068-2-27)	3000 m/s ² , 6 ms
Protection class	IP67
Protection class shaft	IP67

Accessories

RFA-2


1544631



Aluminium flange adapter,
rectangular, for solid shaft encoders
with clamping flange; edge length
63.5 mm; 3 mm thick

RFA-13


1544642



Aluminium flange adapter,
rectangular, for solid shaft encoders
with clamping flange; edge length 80
mm; 4 mm thick

RFA-1


1544630



Aluminium flange adapter,
rectangular, for solid shaft encoders
with clamping flange; edge length 58
mm; 4 mm thick

RFA-4

1544633




Euro flange – aluminium flange
adapter for solid shaft encoders, Ø
115 mm; reference diameter 100 mm;
adapts 58 mm clamping flange to
Euro flange

RFA-6

1544635


Aluminium flange adapter for solid shaft encoders with clamping flange, Ø 58 mm; adapts clamping flange to synchro flange



RFA-7

1544636


Aluminium flange adapter for solid shaft encoders, Ø 65 mm; adapts to Ø 65 mm flange and 48 mm reference diameter



RFA-8

1544637


Aluminium flange adapter for solid shaft encoders with clamping flange, Ø 70 mm; thickness 4 mm, adapts to Ø 70 mm flange



RFA-9

1544638


Aluminium angle flange for solid shaft encoders with Ø 58 mm clamping flange



RFA-11

1544640

Aluminium flange adapter for solid shaft encoders with clamping flange, Ø 70 mm; thickness 10 mm, adapts to Ø 70 mm flange



RFA-12

1544641

Aluminium flange adapter, rectangular, for solid shaft encoders with clamping flange; edge length 70 mm; 10 mm thick

