



RI-10T6S-2B20-H1181

Incremental Shaft Encoder

Industrial Line

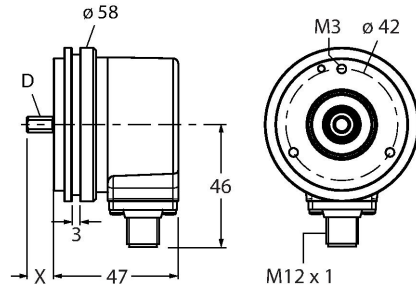



Technical data

Type	RI-10T6S-2B20-H1181
ID	100019831
Measuring principle	Optical
General data	
Max. rotational speed	12,000 rpm
Moment of inertia of the rotor	$1.8 \times 10^{-6} \text{ kgm}^2$
Starting torque	< 0.05 Nm
Output type	Incremental
Resolution incremental	20 ppr
Electrical data	
Operating voltage U_B	10...30 VDC
No-load current	$\leq 100 \text{ mA}$
Output current	$\leq 30 \text{ mA}$
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Pulse frequency max.	300 kHz
Signal level high	min. $U_B - 1 \text{ V}$
Signal level low	max. 0.5 V
Output function	Push-Pull/HTL, with inverted signals
Mechanical data	
Flange type	Synchro flange
Flange diameter	$\varnothing 58 \text{ mm}$
Shaft Type	Solid shaft

Features

- Servo flange, $\varnothing 58 \text{ mm}$
- Solid shaft, $\varnothing 6 \text{ mm} \times 10 \text{ mm}$
- Optical measuring principle
- Shaft material, stainless steel
- Protection class IP65 on shaft side
- -40...+85 °C
- Max. 12000 rpm (continuous operation 6000)
- 10...30 VDC
- Male connector, M12 x 1, 8-pole
- Push-pull, with inverted signals
- Pulse frequency max. 300 kHz
- 20 pulses per revolution

Wiring diagram




Technical data

Shaft diameter D (mm)	6
Shaft Length L [mm]	10
Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
	8-pin
Axial shaft load	40 N
Radial shaft load	80 N
Environmental conditions	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	300 m/s ² , 10...2000 Hz
Shock resistance (EN 60068-2-27)	3000 m/s ² , 6 ms
Protection class	IP67
Protection class shaft	IP65


Accessories

RCS-15-08-06
1545361


Bellows coupling, outer diameter:
15 mm, bore diameter: 8 mm/6 mm


RCS-15-06-04
1545363


Bellows coupling, outer diameter:
15 mm, bore diameter: 6 mm/4 mm


RA-BC-20-06-06
100048777


Bellows coupling with aluminum hub
Ø 20 mm; d1 = 6 mm, d2 = 6 mm


RA-BC-20-06-08
100048778


Bellows coupling with aluminum hub
Ø 20 mm; d1 = 6 mm, d2 = 8 mm


RA-BC-20-06-10
100048779


Bellows coupling with aluminum hub
Ø 20 mm; d1 = 6 mm, d2 = 10 mm


RA-BC-E-20-06-06
100048785


Stainless steel bellows coupling Ø
20 mm; d1 = 6 mm, d2 = 6 mm


RA-BC-E-20-06-10
100048786

Stainless steel bellows coupling Ø
20 mm; d1 = 6 mm, d2 = 10 mm


RA-SDC-30-06-10
100048791


Spring disc coupling Ø 30 mm; d1 =
6 mm, d2 = 10 mm



RA-SDC-30-06-06

100048790


Spring disc coupling Ø 30 mm; d1 = 6 mm, d2 = 6 mm



RA-HC-25-06-10

100048795

Aluminum helix coupling Ø 25 mm; d1 = 6 mm, d2 = 10 mm



RA-HC-25-06-06

100048794

Aluminum helix coupling Ø 25 mm; d1 = 6 mm, d2 = 6 mm

