



RM-116T10C-7AAL-H1151

Absolute Shaft Encoder

Industrial Line

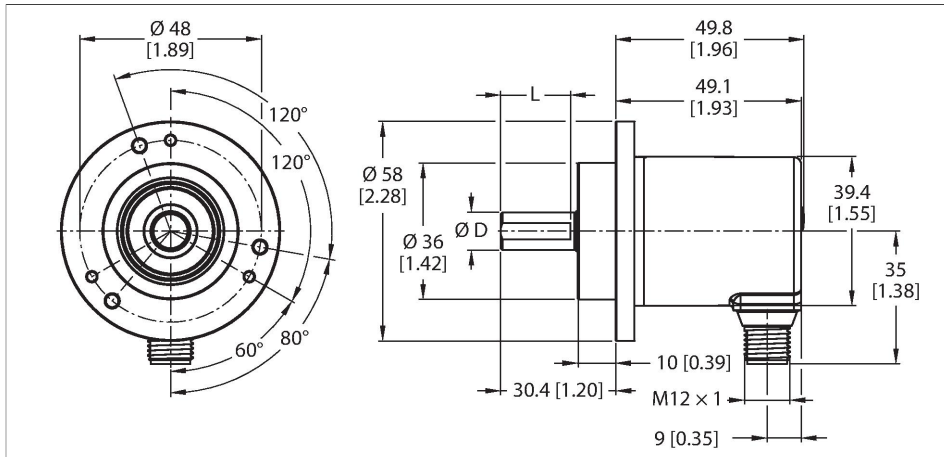



Technical data

Type	RM-116T10C-7AAL-H1151
ID	100020231
Measuring principle	Magnetic
General data	
Max. rotational speed	4000 rpm
Absolute accuracy	$\pm 1^\circ$ At 25 °C
Output type	Absolute multiturn
Electrical data	
Operating voltage U_B	10...30 VDC
No-load current	≤ 38 mA
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Output function	Analog output
Current output	4...20 mA
DA converter resolution	12 Bit
Mechanical data	
Flange type	Clamping flange
Flange diameter	Ø 58 mm
Shaft Type	Solid shaft
Shaft diameter D (mm)	10
Shaft Length L [mm]	20
Shaft material	Stainless steel
Housing material	Die-cast zinc

Features

- Ø 58 mm clamping flange
- Solid shaft, Ø 10mm x 20mm
- Optical measuring principle
- Shaft material, stainless steel
- Protection class IP65 on housing and shaft side
- -40...+85°C
- Max. 4000 rpm (continuous operation: 2000)
- Energy harvesting technology
- 10...30 VDC
- Analog output, 4...20 mA per 16 CCW revolutions
- 12-bit resolution
- M12 x 1 male, 5-pin


Wiring diagram

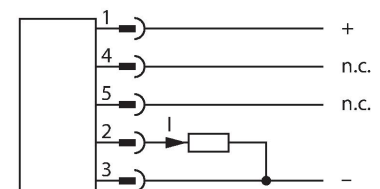

Technical data

Electrical connection	Connector, M12 × 1
	5-pin
Axial shaft load	40 N
Radial shaft load	80 N
Environmental conditions	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	30 g (300 m/s²), 10...2000 Hz
Shock resistance (EN 60068-2-27)	500 g (2500 m/s²), 4 ms
Protection class	IP65
Protection class shaft	IP65

Functional principle

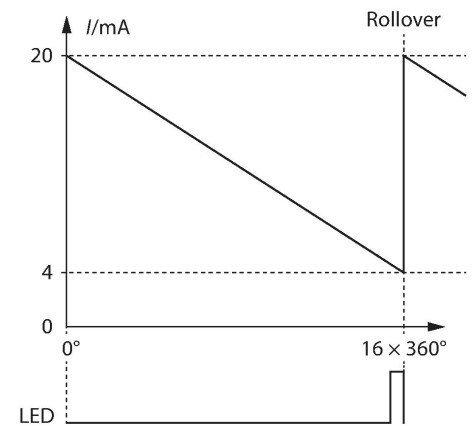


Accessories

RA-BC-20-06-10	100048779	Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 10 mm
RA-BC-20-08-10	100048781	Bellows coupling with aluminum hub Ø 20 mm; d1 = 8 mm, d2 = 10 mm
RA-BC-20-10-10	100048782	Bellows coupling with aluminum hub Ø 20 mm; d1 = 10 mm, d2 = 10 mm
RA-BC-20-10-12	100048783	Bellows coupling with aluminum hub Ø 20 mm; d1 = 10 mm, d2 = 12 mm
RA-BC-E-20-06-10	100048786	Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 10 mm
RA-BC-E-20-10-10	100048787	Stainless steel bellows coupling Ø 20 mm; d1 = 10 mm, d2 = 10 mm
RA-BC-E-20-10-12	100048788	Stainless steel bellows coupling Ø 20 mm; d1 = 10 mm, d2 = 12 mm
RA-SDC-30-10-10	100048792	Spring disc coupling Ø 30 mm; d1 = 10 mm, d2 = 10 mm
RA-SDC-30-10-12	100048793	Spring disc coupling Ø 30 mm; d1 = 10 mm, d2 = 12 mm
RA-HC-25-10-10	100048796	Aluminum helix coupling Ø 25 mm; d1 = 10 mm, d2 = 10 mm


RA-HC-25-10-12

100048797

Aluminum helix coupling Ø 25 mm; d1 = 10 mm, d2 = 12 mm



Wiring accessories

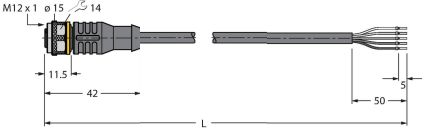Dimension drawing	Type	ID	
	RKC4.5T-2/TEL	6625016	Connection cable, M12 female connector, straight, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval