
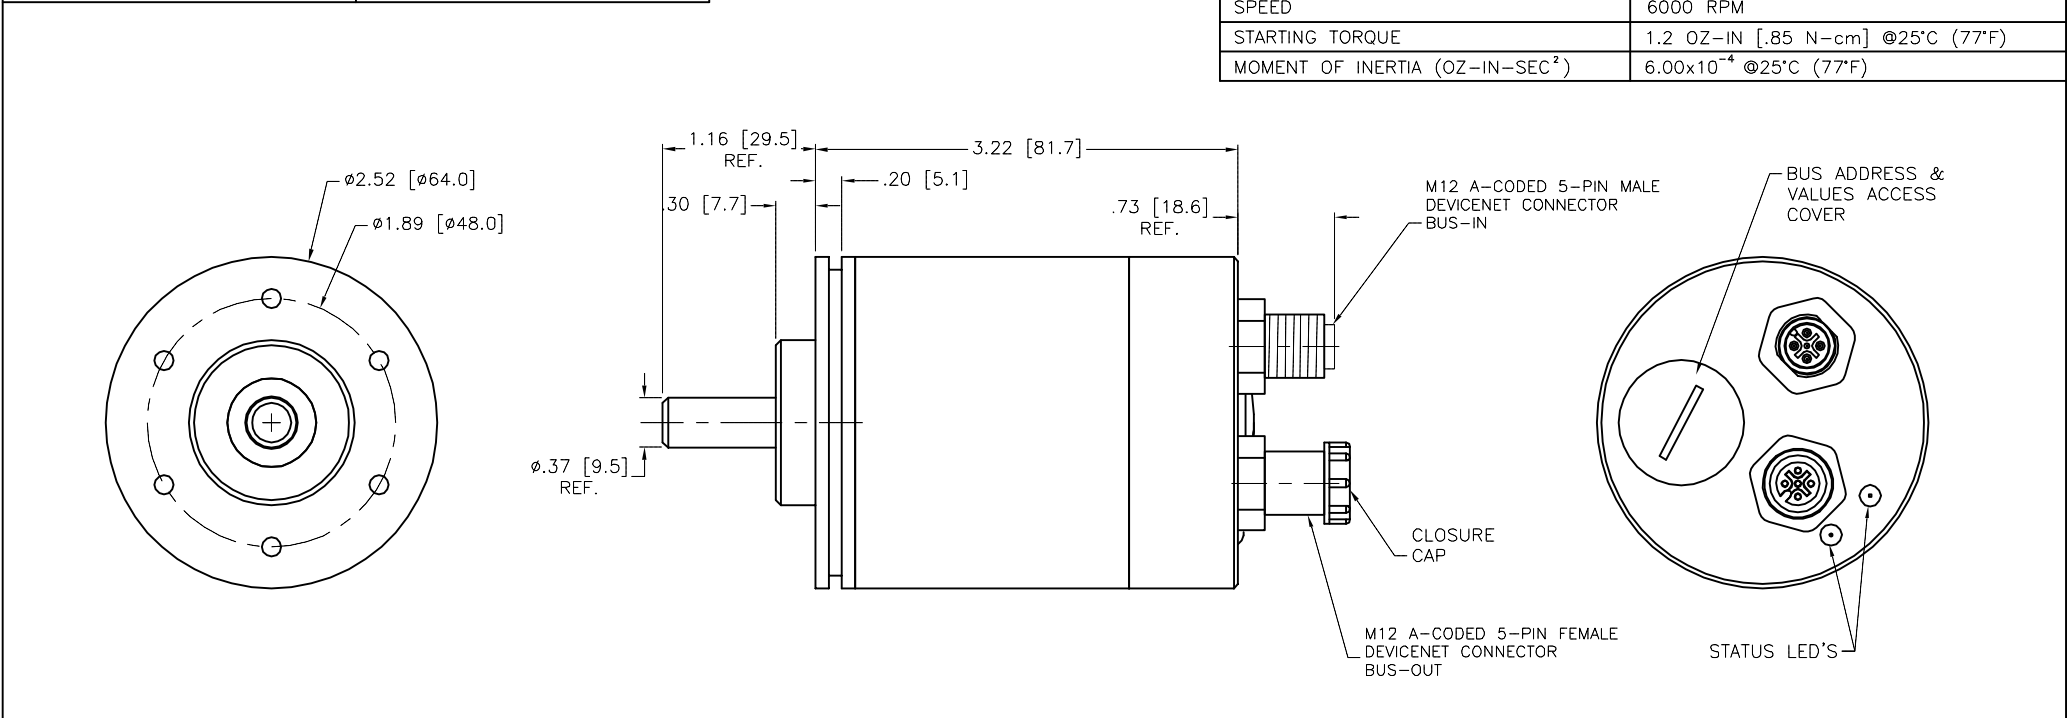


SPECIFICATIONS	
INTERFACE	DEVICENET (DEVICE TYPE 22 _{HEX})
NODE ADDRESS	PROGRAMMABLE FROM 0 TO 63
DATA TRANSFER RATE	125/250/500 Kbits/S
RESOLUTION	16 BIT SINGLE TURN BY 12 BIT MULTI-TURN
POWER SUPPLY	11 TO 25 VDC
POWER CONSUMPTION	50 mA @ 24VDC TYPICAL
LED-NETWORK STATUS	GREEN/RED
LED-MODULE STATUS	GREEN/RED
PROTECTION	IP67
SHOCK	50G's FOR 11mSEC
VIBRATION	20G, 5 TO 2,000 HERTZ
OPERATING TEMPERATURE	-40°C to +85°C (-40°F to +185°F)
HOUSING MATERIAL	POWDER COATED ALUMINUM
SHAFT SEAL MATERIAL	NITRILE
SPEED	6000 RPM
STARTING TORQUE	1.2 OZ-IN [.85 N-cm] @25°C (77°F)
MOMENT OF INERTIA (OZ-IN-SEC ²)	6.00x10 ⁻⁴ @25°C (77°F)

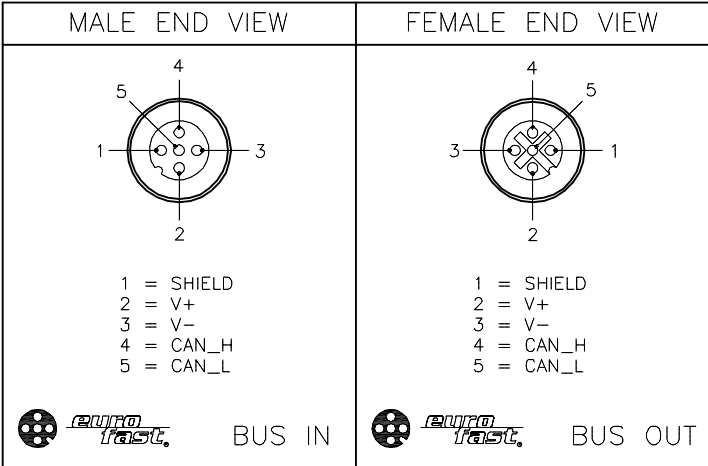

NOTE:

1. THE NODE ADDRESS AND BAUDRATE CAN BE SET USING THE ROTARY/DIP SWITCHES LOCATED UNDER THE DEVICE COVER OR THROUGH SOFTWARE NODE COMMISSIONING.

2. BUS TERMINATION INCLUDED. CAN BE SWITCHED ON/OFF USING A DIP SWITCH UNDER THE COVER.

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

TURCK INC
High Technology Sensors and Automation Controls

RELATED DOCUMENTS

1.
2.
3.
4.

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS
APVD K.H.

DATE 07/24/14
SCALE 1=1.5

UNIT OF MEASUREMENT
INCH [MILLIMETER]

DO NOT SCALE THIS DRAWING

DESCRIPTION

RM-89SA1S0-9B28B-B2M12

IDENTIFICATION NO.

1562104 (SOURCE)

REV

A

A	DRAWING RELEASE	RDS	07/24/14	
REV	DESCRIPTION	BY	DATE	ECO NO.