
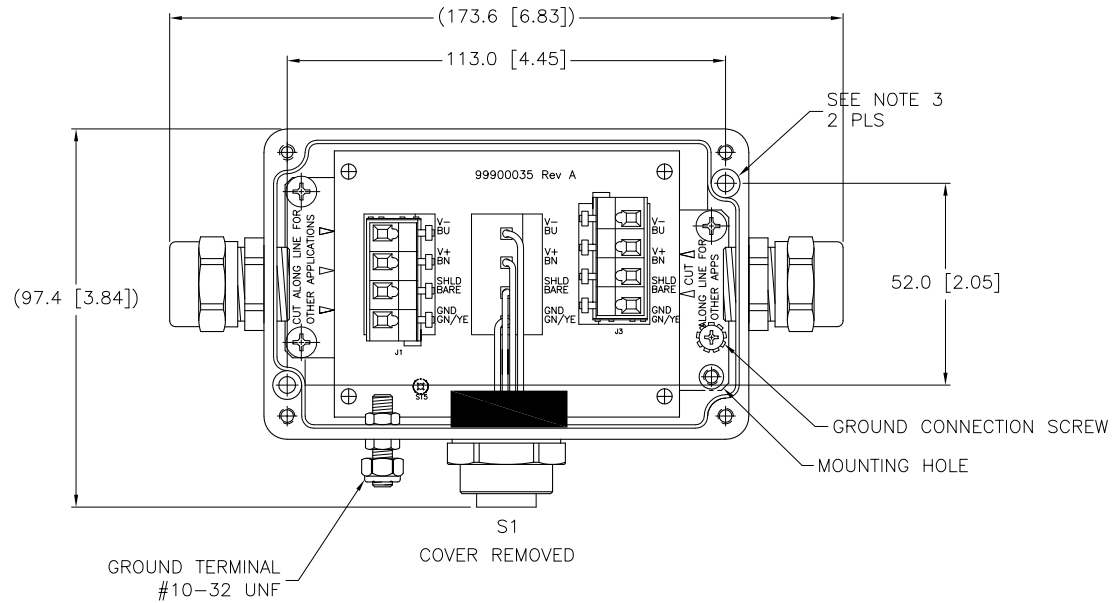


SPECIFICATIONS

HOUSING MATERIAL	ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING	316 STAINLESS STEEL
CONTACT CARRIER/COLOR	POLYURETHANE/BLACK
CONTACTS	GOLD-PLATED BRASS
GROUND STUD MATERIAL	316 STAINLESS STEEL
MAXIMUM VOLTAGE	300V MAX
MAXIMUM CURRENT	9 A MAX
PROTECTION CLASS	NEMA 1,3,4,12,13 AND IEC IP67
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)
MOUNTING HOLES ACCOMMODATE	M4x12 OR #8x1/2 CAP HEAD SCREWS

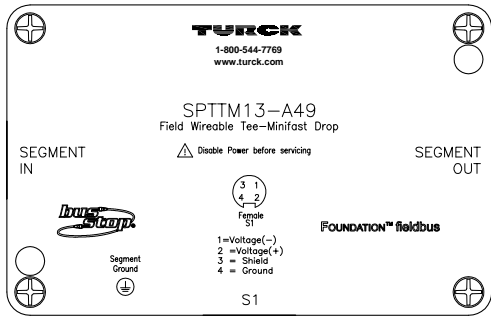

SOURCE DRAWING - FOR REFERENCE ONLY

NOTE(S):

- FOR GROUND CONNECTION, MOVE MOUNTING SCREW TO GROUND CONNECTION HOLE. THE DEVICE SHOULD BE GROUNDED AT ONLY ONE LOCATION IN THE SYSTEM TO PREVENT GROUND LOOPS.
- BOX HEIGHT= 58.4 [2.30] NOMINAL.
- MOUNTING HOLE EXCEPTS M4 OR #6-32 SOCKET HEAD CAP SCREWS, 16.0 [.63] MINIMUM LENGTH.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
			DRFT DF DSGN DF	DATE 11/10/00 SCALE 1=2
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U0139-113
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING	REV B
B CONVERT DRAWING TO TURCK FORMAT	CBM 08/24/04	11800	FILE: U0139-113	
REV DESCRIPTION	BY	DATE	ECO NO.	SHEET 1 OF 1